


Operating Instruction Supplement Nakamichi 1000II/700II



Recording & Record Head Azimuth Alignment

Nakamichi 1000II

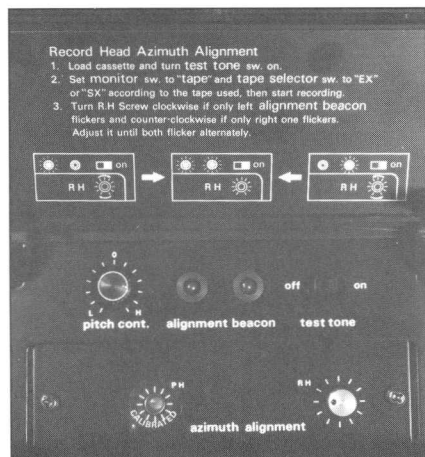


Before recording, please be sure to adjust the record head azimuth using the record head azimuth alignment beacon whenever you change cassette tapes (even when you change from side A to side B of the same cassette tape).

If the left-hand (1000II) or upper-hand (700II) stays lit, the record head alignment knob (RH) should be turned clockwise slowly.

If the right hand (1000II) or lower-hand (700II) stays lit, the record head alignment knob (RH) should be turned counter-clockwise slowly.

When both lights are alternately flickering, the record head azimuth alignment is correct.

Nakamichi 700II

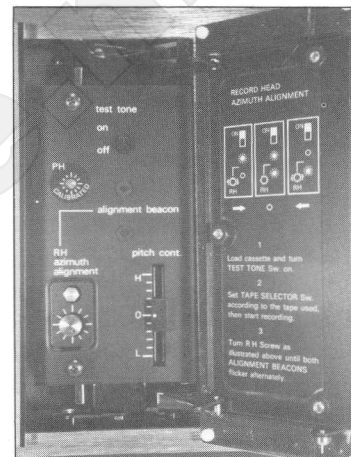

NAKAMICHI RESEARCH (U.S.A.) INC.
West Coast Office
1101 Colorado Avenue,
Santa Monica, Calif. 90401
Phone: (213) 451-5901
Telex: 652429 (NAKREI SNM)

NAKAMICHI RESEARCH (U.S.A.) INC.
New York Office
220 Westbury Avenue,
Carle Place, N.Y. 11514
Phone: (516) 333-5440
Telex: 144513 (NAKREI CAPL)

NAKAMICHI RESEARCH INC.
1-153 Suzukicho, Kodaira, Tokyo
Phone: (0423) 42-1111
Telex: 2832610 (NAKREI J)
Cable: NAKREI KKB