

33 Series


33 Pre-Amplifier (production from 1967-1982)

Features

High quality stereo control unit with inputs for Disc, Radio 1, Radio 2 and Tape.

The required input is selected by press buttons. Volume adjustment being by rotary treble, bass and balance controls allow the listener to correct for room effects and programme balance.

The disc input can be adjusted for different sensitivity cartridges (moving magnet only) and tape input/output can be altered to match different types of tape recorders.

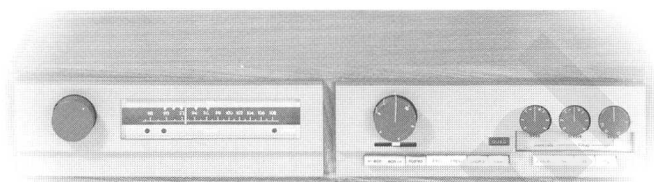

Specification

Controls:	Volume, Treble, Bass, Balance, Filters / Filter slope, Input Selectors
Inputs (4):	Disc; Radio 1; Radio 2; Tape
Amplifier Output:	500mV
Tape Output:	Adjustable for 100mV, 400mV or 1V
Dimensions:	260mm wide; 92mm high; 165mm deep
Weight:	3.8Kg
Finish:	Brown
Audio Sockets:	5-pin DIN for all inputs. 4-pin DIN amplifier output

Main Accessories/Spares

Description	Spares ref.	
4-pin DIN to 4-pin DIN signal lead (1m)	QD4D411A	
4-pin DIN to Phono signal lead (1m)	QD4FP1A	
CD adaptor/attenuator (20cm)	PCD316M	
AC interconnect 2-pin to 3-pin Bulgin socket 1m	QU2BS1A	
AC interconnect 2-pin to 3-pin Euro socket 1m	QU2ES1A	
AC interconnect 2-pin to bare wires (1m)	QU2001C	
AC Power plug 3-pole Bulgin	PSP430S	
Bulb 6.5V 1W LES type 674	BB6V5LA	lights up Quad logo
Volume control and on/off switch	R33VOLA	
Push button set	Q33BUTT	supplied with 2 x disc buttons
Foot (usually 4 required)	AFCOL12	