


ESL-63 Subwoofer

Features

- A high quality subwoofer system designed specifically to work with the Quad ESL-63.
- Extends the lower base response to 28Hz (-3dB) to provide the highest possible sound quality from a good source. Dipole operation to match the ESL-63. Mounts beneath the loudspeaker to act as a stand.
- Supplied with an active crossover and power unit.

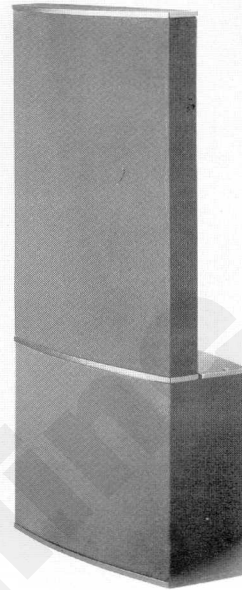

Specifications

SUBWOOFER

Maximum input:	90V at 16 ohms programme (thermally limited)
Amplifier recommendation:	50-250w into 8 ohms
Drive units:	Two 300mm long throw (per speaker)
Impedance:	4 or 16 ohms
Dimensions:	660mm wide; 475mm high; 285mm deep (total height with ESL-63 1325mm)
Weight:	22.0Kg each
Finish:	Black or Brown
Speaker sockets:	Binding posts/4mm banana sockets

CROSSOVER UNIT

Crossover frequency:	110Hz
Dimensions:	182mm wide; 50mm high; 130mm deep
Power Supply:	23 0V-18V AC-AC adaptor; 100mA; 1.8w